


Decoder smartMPEG Lite

Connector Description

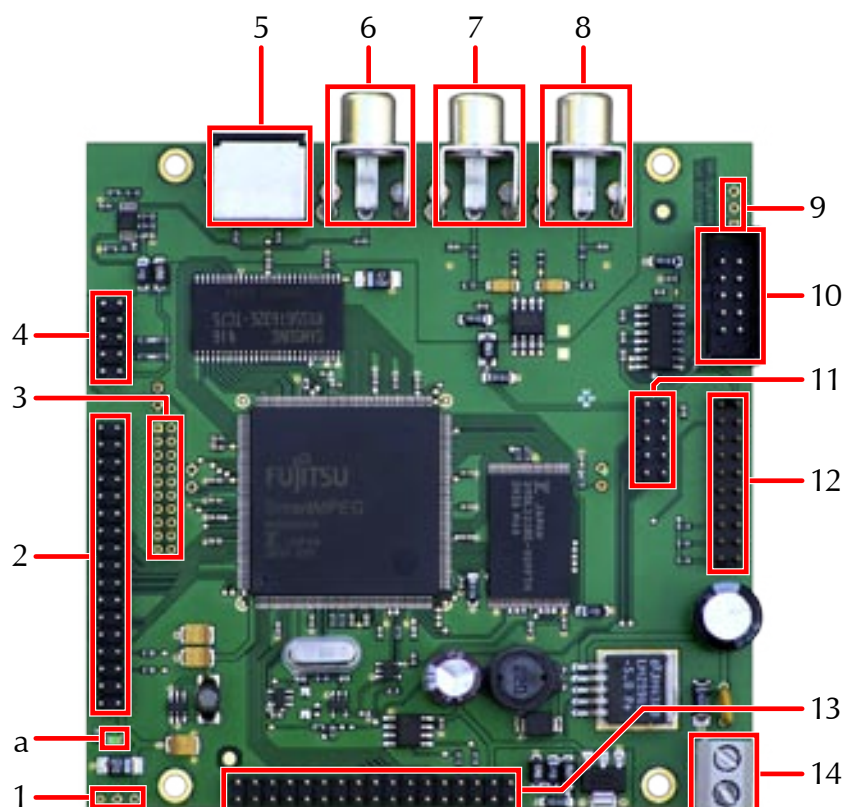

board dimensions: 100×100 mm

Connectors	1	3pin Header	IR Diode
	2	34pin Header	Transport Stream B (or ITU 656 [in or out])
	3	20pin Header	Transport Stream B (or ITU 656 [in or out])
	4	10pin Header	I ² C Frontpanel
	5	Mini-DIN Connector	S-Video
	6	Cinch Connector	Composite Video
	7	Cinch Connector	Audio R
	8	Cinch Connector	Audio L
	9	3pin Header	RS232 (9k6—115k2 8N1)
	10	10pin Header	RS232 (9k6—115k2 8N1)
	11	10pin Header	Debug Port
	12	20pin Header	opt. RGB out + S/P-DIF
	13	34pin Header	Transport Stream A
	14	2way screw clamp	Power in (8—24 V)

Other	a	LED green	Power ok (5 V)